


now available > stainless steel finish

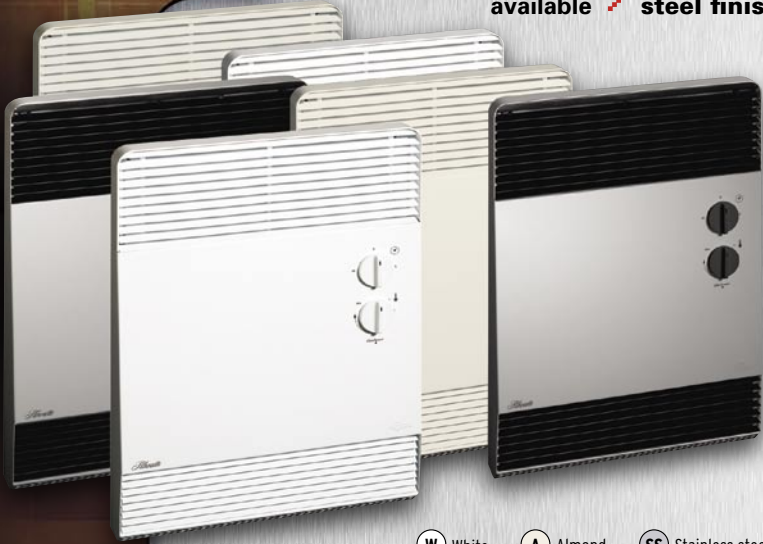

(W) White (A) Almond (SS) Stainless steel

> **Features**

Colour

White, almond or stainless steel

Finish

Coated with an ultra-resistant and easy-to-clean polyurethane powdercoat

Manufacturing

20-gauge steel cabinet

Wattage & voltage

See the selection table.

Element

Open-coil, nichrome element producing instant heat.

Control

- Precise electronic thermostat ensuring both comfort and energy efficiency.
- Built-in timer increasing heat rapidly.

Installation

- Quick and easy to install, surface-mounted or recessed.
- When recessing into the wall, prepare an opening (11 1/4 in. (SILVC1560) or 14 1/4 in. (SILVC2060) wide by 18 1/4 in. high) at least 4 in. from the floor.

Warranty

- 10 years (element)
- 1 year (unit)

2-in-1

Once again, we have succeeded in combining two heating methods into one unit. Offering both natural convection and forced-air heating, the **SILVC2060** and the **SILVC1560** are the newest generation of heaters. These stylish bathroom heating units are also very quiet and appealing to look at.

One heater harmonizing two different heating methods is a recipe for success!

• 2 heating methods:

- the built-in electronic thermostat activates a natural convection heating mode, generating 1000 W (**SILVC2060**) or 750 W (**SILVC1560**) of noise-free heat (0 decibel);
- the 60-minute built-in timer activates a forced-air heating mode, doubling the regular heating capacity to 2000 W (**SILVC2060**) or 1500 W (**SILVC1560**) when you need it the most.

• Quick and easy installation.

• Complimented by the same European design as our Silhouette series.

• Surface-mounted or recessed.

• Coiled element ensuring instant heat.

> **Selection table**

Type	watts	volts	height mm	height in.	width mm	width in.	kg	lb
SILVC2060	1000/2000	240	489	19 1/4	422	16 5/8	11.2	24.5
SILVC1560	750/1500	240	489	19 1/4	340	13 3/8	8.2	18

Add W for white, A for almond or SS for stainless steel.

> **Technical drawings**

