




Specification Data

Heater/Fan/Light A515A W (80 CFM)

Description

Low noise, ceiling mount bathroom ventilation fan suitable . Low RPM for quiet operation. Conforms to UL/ CUL safety standards when used with GFCI circuit wiring. Includes 2 anti-blast infrared heat lamps and a 60W incandescent bulb.

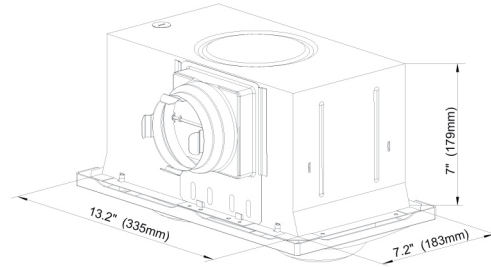

Motor

- Centrifugally balanced wheel for quiet efficient operation
- Power rating 120v/60Hz
- Motor equipped with thermal shut off
- Permanently lubricated enclosed condenser motor engineered for quiet operation
- UL/CUL Listed for use in insulated ceilings (Type I.C.)

Listed for use in insulated ceilings (Type I.C.). Do not install directly over tub/shower.

Housing

- 4" duct connector with built-in back-draft dampener
- Rust-proof paint on a steel body

Grille

- Low maintenance, wipe clean
- Attaches to housing with torsion springs

Installation

- Fan motor unit easily detaches from housing for ease of wiring and installation
- Do not install directly over tub/shower
- Adjustable mounting brackets included

Warranty

- Four (4) years on parts

Lighting

- Includes 2 anti-blast infrared heat lamps

Air Flow	80 CFM @0.1"SP
Noise Level	1.0 @0.1"SP
Watts	610
Energy Efficiency	—
Speed	Single
Amps	5.1
Duct	4 " Round
Motor	Condenser
Bearing Type	Ball
Blower Wheel	Sirocco
Grille	Polymeric
Mounting Dimensions	7 1/2"x13 3/4"x13 3/4"
Grille Dimensions	9 1/16"x15 3/4"
Weight	11 lbs
Energy Star	—
CA Title 24	—
HVI Certified	—
UL/CUL	Yes
WA VIAQ Code	—

